
CYLINDRICAL INSULATORS



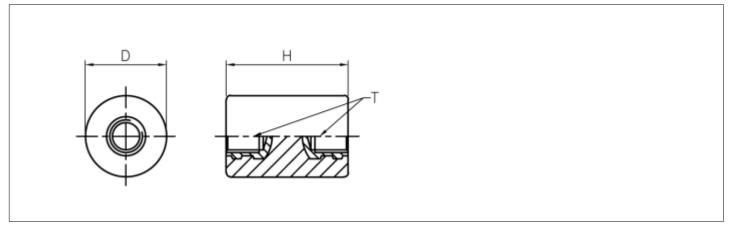

| DIMENSIONAL DATA | | | | | | | | | |
|-----------------------------------|---------|----|----|--------|----|--------|----|---------------|--------------|
| ITEM NAME | ITEM | D1 | Н | INSERT | | INSERT | | Rated Voltage | Test Voltage |
| | CODE | | | T1 | L1 | T2 | L2 | Nateu voitage | (For 1 Min) |
| CYLINDRICAL INSULATOR M6 X 20 HT | CYL0620 | 20 | 20 | M6 | 7 | M6 | 7 | 440 V | 2 KV |
| CYLINDRICAL INSULATOR M6 X 25 HT | CYL0625 | 20 | 25 | M6 | 9 | M6 | 9 | 440 V | 2 KV |
| CYLINDRICAL INSULATOR M8 X 30 HT | CYL0830 | 20 | 30 | M8 | 12 | M8 | 12 | 440 V | 2 KV |
| CYLINDRICAL INSULATOR M10 X 50 HT | CYL1050 | 50 | 50 | M10 | 16 | M10 | 16 | 440 V | 2 KV |
| CYLINDRICAL INSULATOR M12 X 60 HT | CYL1260 | 50 | 60 | M12 | 25 | M12 | 25 | 600 V | 2 KV |

^{*} Insert sizes could also be varied to suit customer requirement

epoxyinsulators.in 11